Microstrip Dual Junction Circulator

Part Number: KTMC-502AS7

Key Features

- Frequency Range: 5.2GHz - 5.7GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Load Power (W)	Connector Type
KTMC-502A7	5.2 - 5.7	full	0.4(1→2) 0.7(2→3)	20(2→1) 39(3→2)	1.25	10	GWB

Mechanical Dimensions (mm)

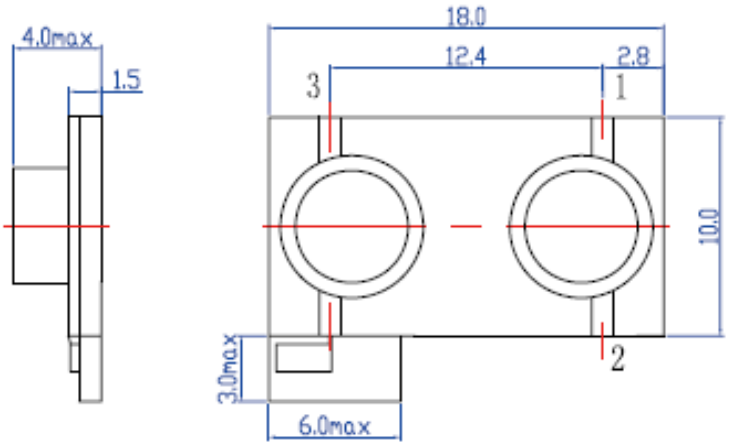

HOW TO ORDER

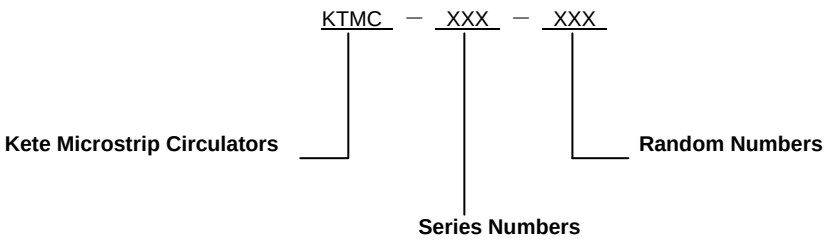

No. 981, Baozhou Road, Quanzhou, Fujian, China (PC: 362000) ◇Web: www.ketemicro.com
Tel: 86-595-22597735 ◇Fax: 86-595-22557059 ◇E-mail: sales@ketemicro.com

Revision 04-2020